


Specialty Products




The revolutionary method to safely seal persistent MAC leaks!

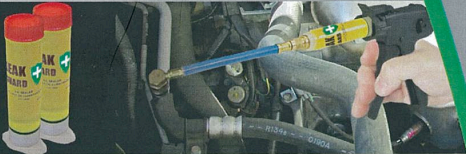

- + Seals Hard to Find Refrigerant Leaks
- + Safe for All MAC Systems & Recovery Machines
- + Prevents Costly Comebacks

REVOLUTIONARY TECHNOLOGY

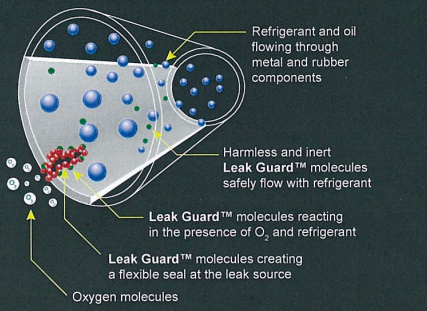

Leak Guard™ molecules are activated only when the refrigerant (R134a & R12/R22) and oxygen are both present.



No polymers, no crystals and does not react to moisture.


Inject Leak Guard™ into every vehicle as a preventative measure to:

- ✓ protect against harmful refrigerant loss
- ✓ extend the life of the MAC system
- ✓ inject pre-mixed UV dye in one easy step
- ✓ prevent emissions into the environment




▲ As simple as injecting dye into the HIGH side with the engine OFF.

Specialty Products

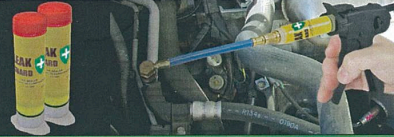

Leak Guard™ Results¹

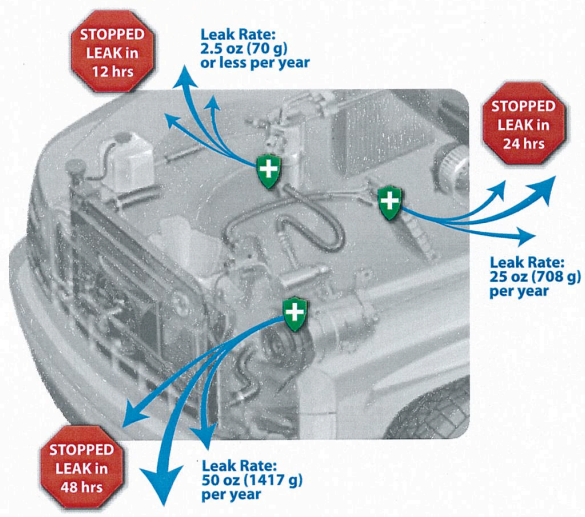

No Harm Results
Stability and Compatibility Test
for Additive for Use In MAC²

- ✓ Wear Testing
- ✓ Physical Properties
- ✓ Hardness
- ✓ Volume
- ✓ Visual Inspection Metallics
- ✓ No Particles, Precipitates, or Insolubles
- ✓ No Refrigerant Decomposition
- ✓ Non-metallics Compatibility



¹ - Controlled Laboratory Conditions Simulating a 2 lbs (900 g) Mobile Air Conditioning System

² - Conducted by Intertek Testing Services, Columbus, OH, USA - An independent organization testing for safety, performance, and certification in compliance with American Society for Testing and Materials Worldwide (ASTM)

#480300EU



Leak Guard™ MAC Sealant System Professional Cartridge Injection System

- 2 cartridges of Leak Guard™
- Contains no refrigerant!
- Primer cartridge to pre-fill the hose
- UView Junior injection gun
- MAC HIGH side adapter hose & R-12 adapter

#480302EU



Leak Guard™ Refill Cartridges

(2) 1 oz /30 g cartridges designed to fit the UView Junior injection system.